




XPEL FUSION PLUS™ PAINT & PPF is a flexible and thin, 9H ceramic coating, purposely developed to perform with PPF (paint protection film) and painted surfaces. PAINT & PPF offers unrivaled gloss, superior hydrophobic protection, and

improved scratch resistance with a single layer application.

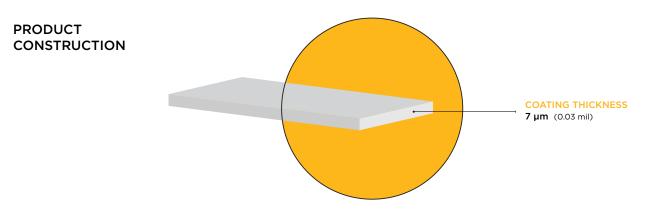

| GENERAL CHARACTERISTICS | |
|-------------------------|---|
| PROPERTIES | INFORMATION |
| Pencil Hardness | 9Н |
| Bottle Size | 50ml |
| Shelf Life | 1 Year from ship date when unopened and stored dry at 72° F (22° C) @ 50% RH Once opened and stored properly, use within 14 days |
| Application | Foam Block with microsuede towel |
| Appearance | Clear |
| Temperature Resistance | >760 Degrees Celsius |
| Mandrel Bend | (ASTM D522) 0% at 180 Degree Rotation |
| Dry Time | 6 Hours before getting wet |
| Cure Time | 3 days |



Notice: The representations of performance and suitability for use contained in this Technical Data Sheet are meant only as a guide. Since only the user is aware of the specific conditions in which the product is to be used, it is the user's responsibility to determine whether the product it suitable for that intended use.