


XPEL **RX PROTECTION FILM** is an industrial strength, self-adhesive, clear-coated thermoplastic polyurethane film designed to protect commercial monitors, personal devices, and other surfaces. XPEL **RX** is specifically formulated to resist the growth of microbes on its surface. Combining the industrial strength of our Silver Ion material with its unrivaled impact resistance and HD clarity, XPEL **RX PROTECTION FILM** is the ultimate in device protection.

PRODUCT CONSTRUCTION

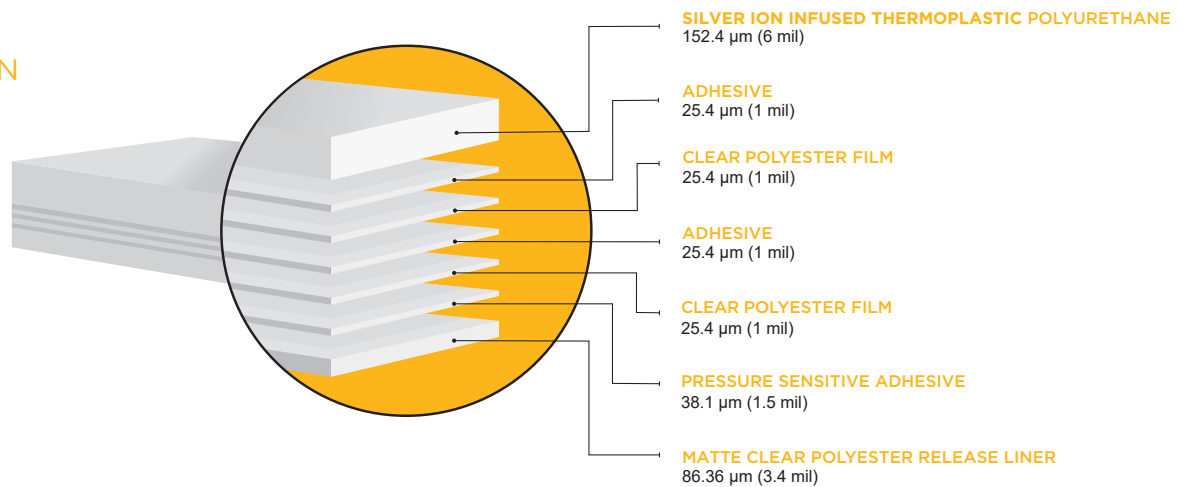

GENERAL CHARACTERISTICS

PROPERTIES	TYPICAL VALUES	TEST CONDITIONS	STANDARDS USED
Peel Adhesion	Average oz/in (N/m)	(Modified 72 hr. RT dwell time)	ASTM D 903
Stainless Steel	49 (539)		
Acrylic	97 (1067)		
Glass	51 (561)		
Polypropylene	11 (121)		
Polyethylene	10 (110)		
Expected Shear (hours)	50	A (1 hr. dwell, 1 sq. in, 4 lb. load)	ASTM D 3654 Method
Tack (g)	500		ASTM D 2979

* For guidance only, not to be used for setting specifications. Due to the custom nature of this product, the data presented are based on three or less production runs.

EXPECTED EXTERIOR LIFE	2-Year
SERVICE TEMPERATURE RANGE	-40°F to 212°F (-40°C to 100°C)
MINIMUM APPLICATION TEMPERATURE	50°F (10°C)
STORAGE STABILITY	2-Years stored at 70°F (21°C) and 50% RH